Animorph

Moonn Electronics

Use me to build a version of the Two Lane that was designed by the Tone God

Hi there!
Thank you for building me!

I am a fuzz.
I kinda am two fuzzes and you can blend between them with the Clip potentiometer.
So thats cool.
If you want to you can put all sorts of different transistors in Q1 and diodes in D1, D2 and D3.
So yea... get creative and stuff.

If you have any questions or anything else to say, just write an email to
moonnelectronics@gmail.com

Have a nice day!

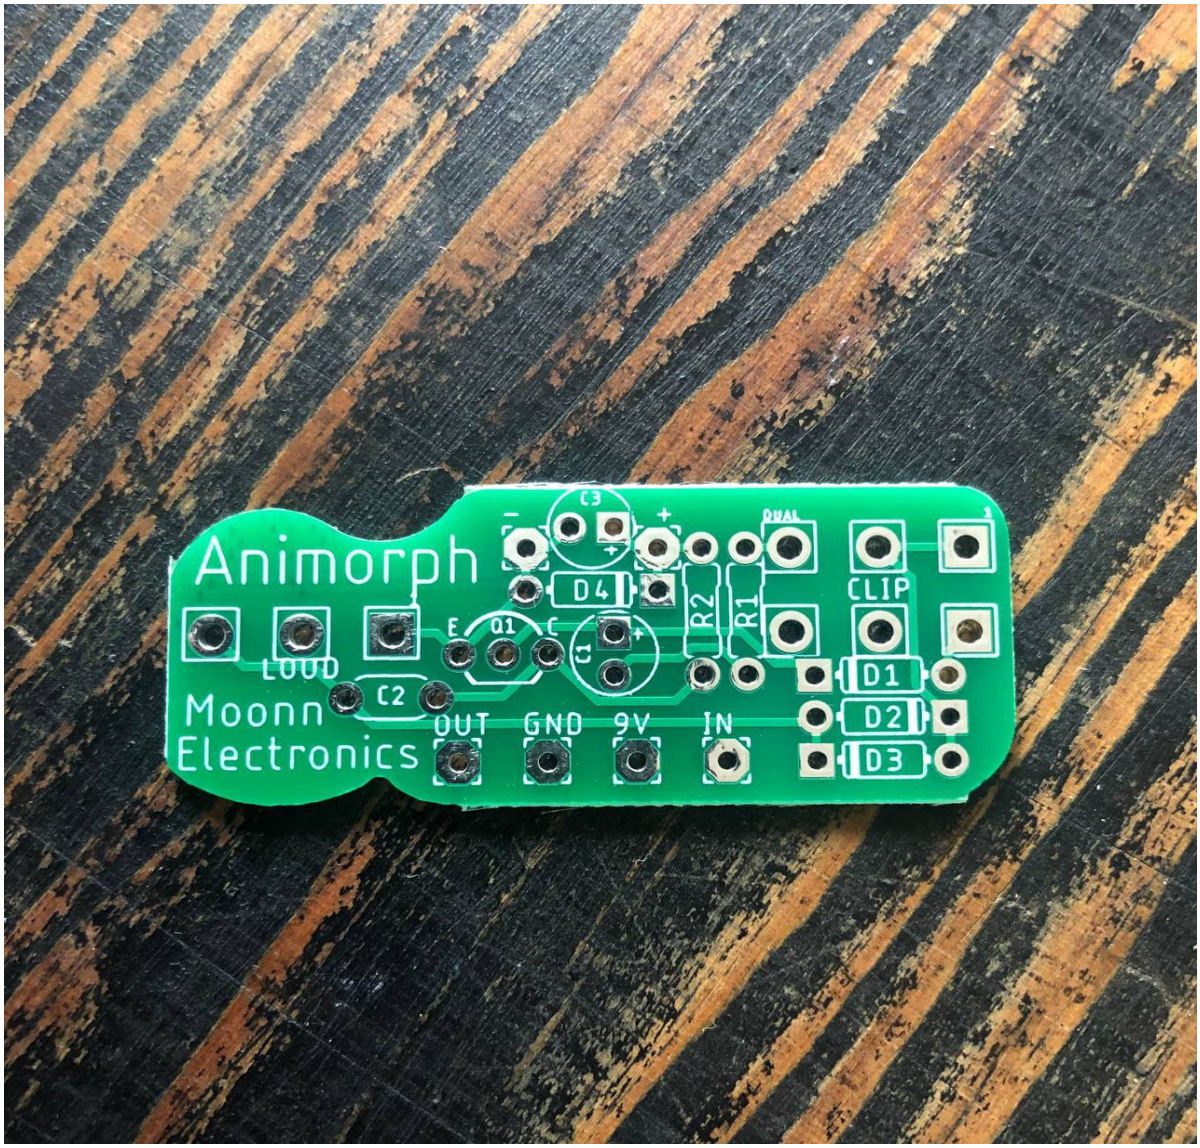

Moonn Electronics is in no way affiliated with the Tone God

Bill of Materials

Qty	Value	Parts
Resistors		
1	100K	R2
1	1M	R1
Film Capacitors		
1	220n	C2
Electrolytic Capacitors		
1	4u7	C1
1	100u	C3
Semiconductors		
3	1N4148	D1, D2, D3
1	1N4001	D4
1	2N5088	Q1
Potentiometers		
1	A100K	LOUD
1	B250K Stereo	CLIP

Schematic

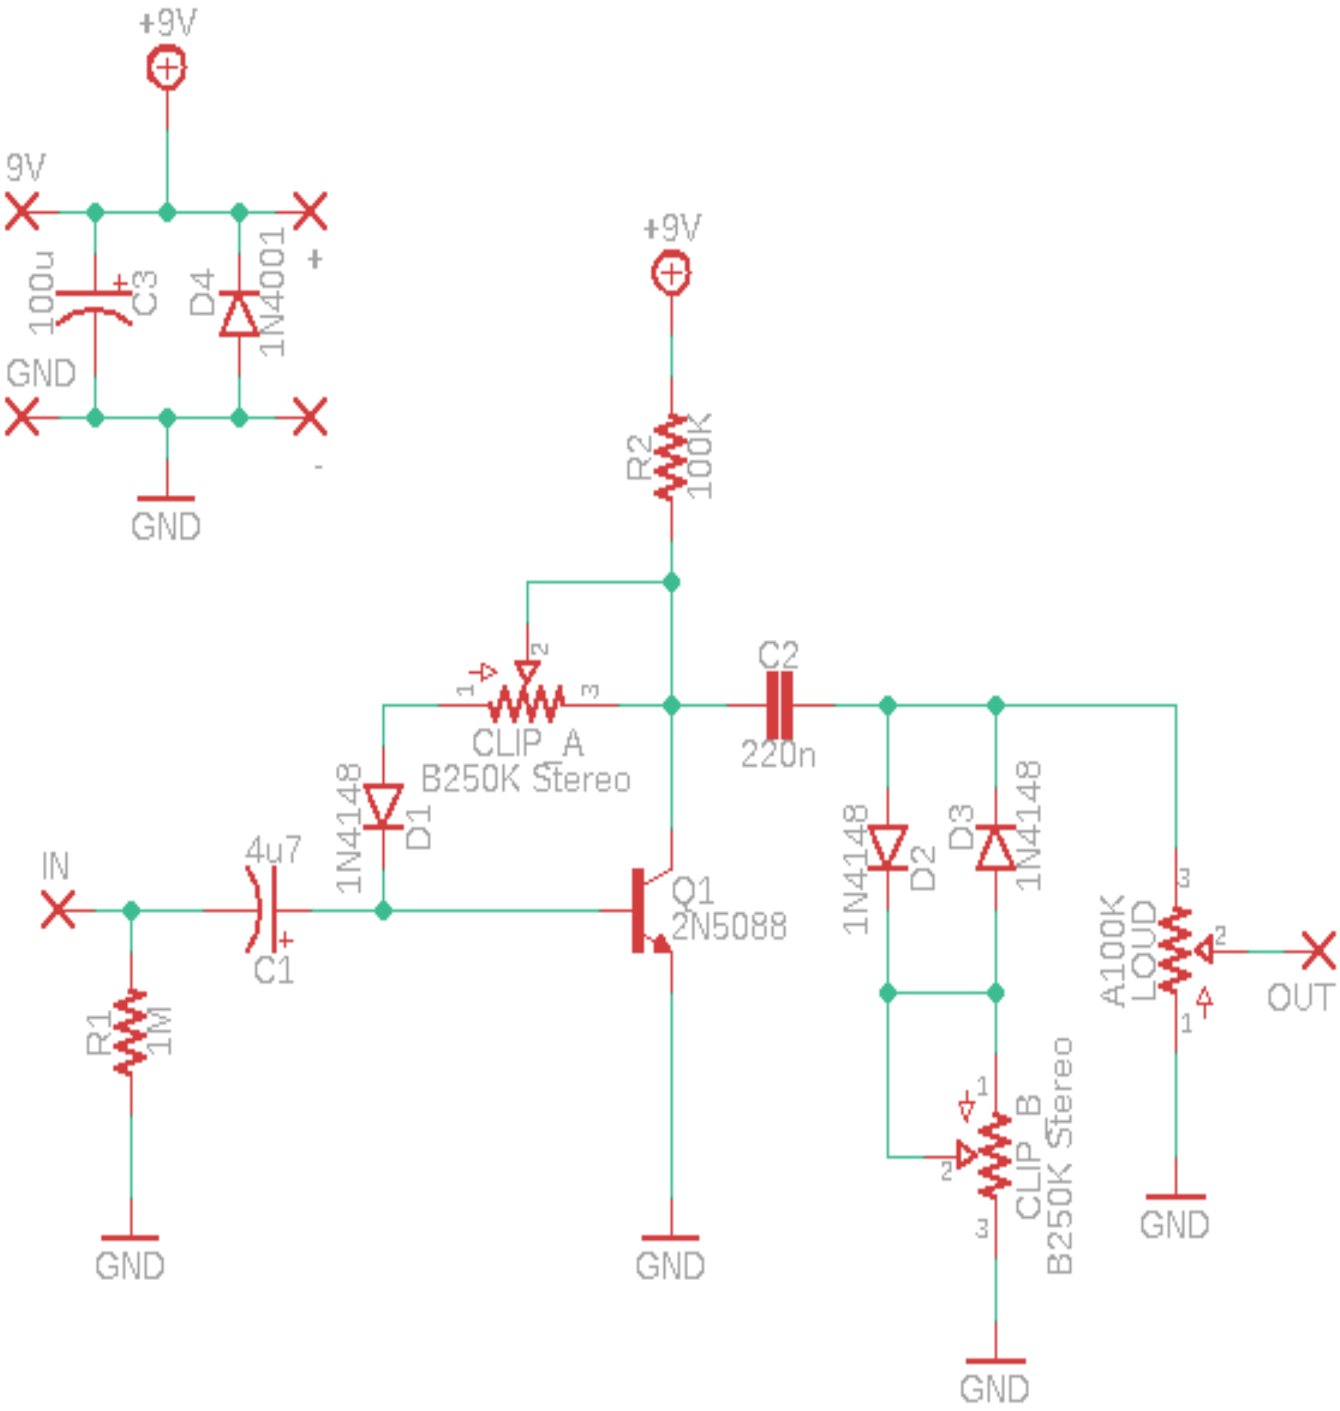
+9V
9V
100u
C3
D4
1N4001
GND
+9V
R2
100K
CLIP_A
B250K Stereo
C2
220n
1N4148
D1
IN
4u7
C1
R1
1M
Q1
2N5088
1N4148
D2
D3
1N4148
A100K
LOUD
OUT
CLIP_B
B250K Stereo
GND
GND
GND
GND

Offboard Wiring